Video wall digital slim bezel 46"

| | Specification |
|--|---|
| model | : HBS-PJ4600 |
| Show diagonal | : 46' |
| Bezel wide | : 3mm |
| | Panel parameters |
| physical dimension | : 1022X576.6MM |
| Ratio | : 16:9 |
| Backlight | : LED |
| Resolution | : 1920X1080 |
| brightness | : 500CD/M ² |
| Contrast | : 4000:1 |
| color | : 16.7M |
| Response time | : 8ms |
| Viewing angle (up and down/left/right) | : 178°/178° |
| | interface |
| НОМІ | : HDMI input X1 |
| RS232 input | : RS232 input X1 |
| | 110202 mpdt 7(1 |
| RS232 output | : RS232 output X2 |
| RS232 output Remote control receiving port | |
| | : RS232 output X2 |
| Remote control receiving port | : RS232 output X2 : Remote control receiving input X1 |
| Remote control receiving port | : RS232 output X2 : Remote control receiving input X1 : USBX1 |
| Remote control receiving port | : RS232 output X2 : Remote control receiving input X1 : USBX1 power supply |
| Remote control receiving port USB Operating Voltage | : RS232 output X2 : Remote control receiving input X1 : USBX1 power supply : AC220V 50/60Hz |
| Remote control receiving port USB Operating Voltage Maximum power consumption | : RS232 output X2 : Remote control receiving input X1 : USBX1 power supply : AC220V 50/60Hz : 240w |
| Remote control receiving port USB Operating Voltage Maximum power consumption | : RS232 output X2 : Remote control receiving input X1 : USBX1 power supply : AC220V 50/60Hz : 240w : 0.3w |





Video wall digital slim bezel 46" Features :

- Full hardware architecture, professional splicing chip design without CPU and operating system
- Multi-line parallel processing, powerful processing function;
- Integrated multi-channel video signal source
- RS232 serial port remote control; support two-channel RS232 loop output;
- The underlying communication protocol can be opened, which is convenient for users to flexibly adopt the third-party central control, system or self-program software to construct the large-screen engineering system
- Embedded firmware intelligent upgrade system.
- Narrow frame all metal frame design
- Fully silent industrial fan with automatic temperature switch
- With 3D noise reduction, 3D filtering, 3D de-interlacing function
- Comes with large screen splicing pieces, one-key splicing, easy to use
- Energy-saving, environmentally friendly, no radiation, support 7*24 hours of uninterrupted work, adapt to all kinds of working environments that need to be turned on for a long time
- Uniform brightness, stable image, no flicker, no distortion



Video wall digital slim bezel 46"

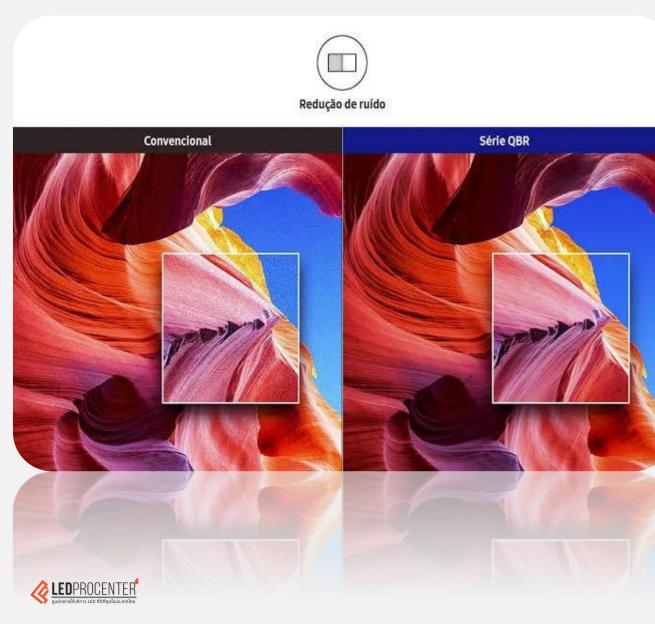

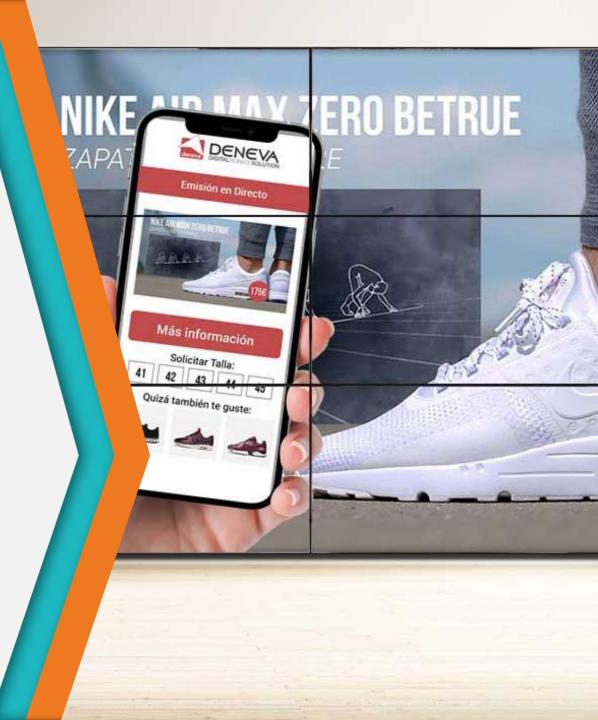


Video wall digital slim bezel 46"

Sample Picture





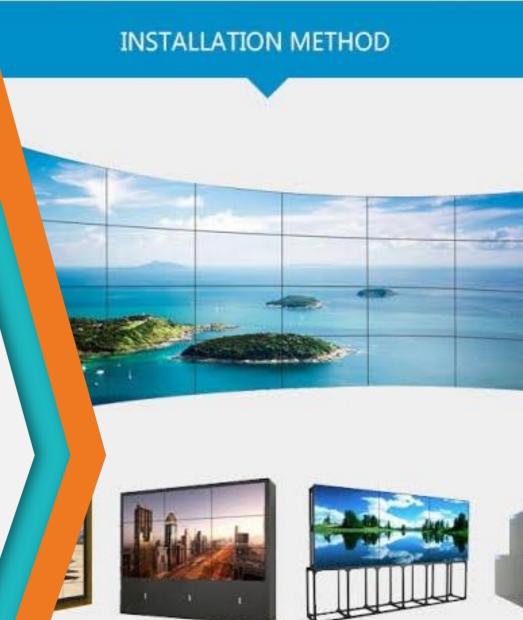

Cabinet type

/pe

Floor stand type

Push